



WALL MOUNT VDE-TYPE, 6.0VDC 0.30Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 1.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A20630G	6.0V	0.30A	1.80VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*43W*37H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx43Wx37H (EI35*16)

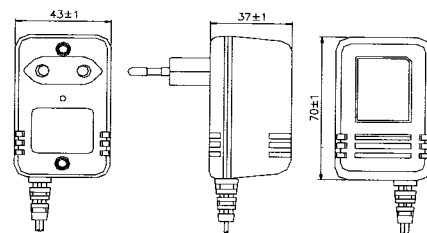

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 6.0VDC 0.50Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to .3.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30650G	6.0V	0.50A	3.0VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*51W*39.5H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx51Wx39.5H (EI41*16)

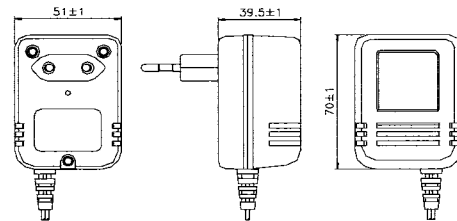

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 6.0VDC 0.80Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 4.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30608G	6.0V	0.80A	4.80VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 75L*51W*39.5H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 75Lx51Wx39.5H (EI41*21)

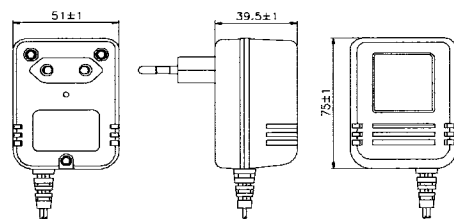

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 6.0VDC 1.0Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 6.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A40610G	6.0V	1.0A	6.0VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 83L*58W*46H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 83Lx58Wx46H (EI48*23)

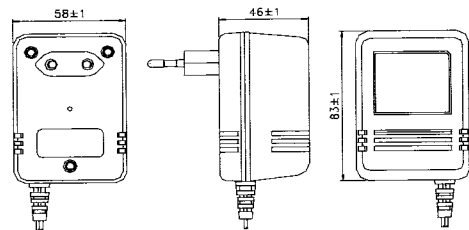

For reference only.

For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 6.0VDC 0.20Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 1.20VA
- ◆ Regulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
R2W006-200G	6.0V	0.20A	1.20VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*43W*37H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx43Wx37H (EI35*16)

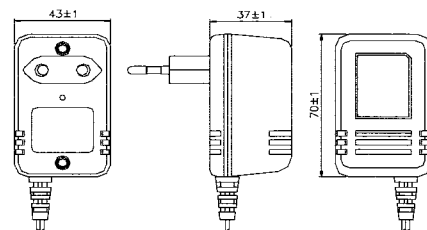

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 6.0VDC 0.90Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 5.40VA
- ◆ Regulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
R4W006-090G	6.0V	0.90A	5.40VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 89L*61W*47H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 89Lx61Wx47H (E148*30)

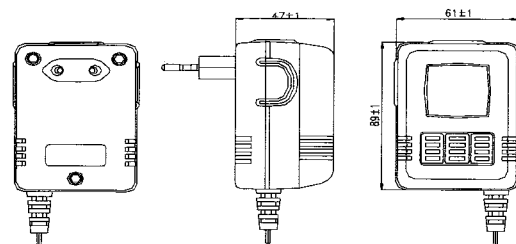

For reference only.

For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 9.0VDC 0.30Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 2.70VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A20930G	9.0V	0.30A	2.70VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*43W*37H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx43Wx37H (EI35*16)

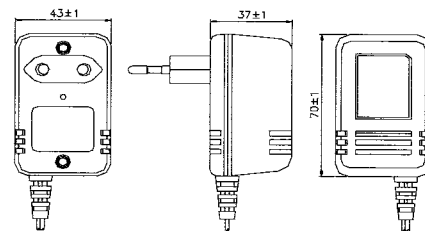

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 9.0VDC 0.50Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to .4.50VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30950G	9.0V	0.50A	4.50VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*51W*39.5H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx51Wx39.5H (EI41*16)

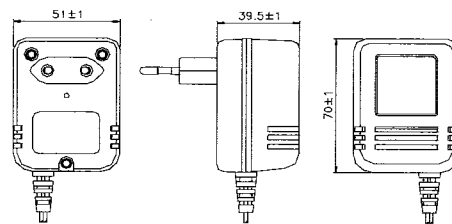

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 9.0VDC 0.70Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 6.3VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30907G	9.0V	0.70A	6.3VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 75L*51W*39.5H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 75Lx51Wx39.5H (EI41*21)

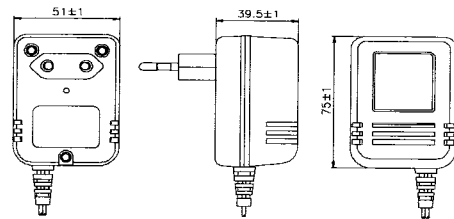

For reference only.

For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 9.0VDC 0.80Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 7.20VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A40908G	9.0V	0.80A	7.20VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 83L*58W*46H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 83Lx58Wx46H (EI48*23)

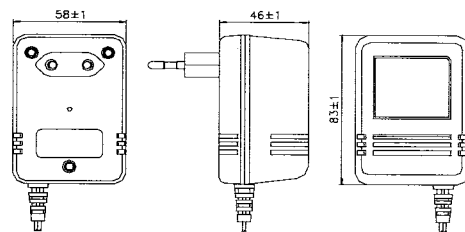

For reference only.
For details please contact your local sales representative



SINO-AMERICAN ELECTRONIC CO., LTD.

www.sac.com.tw

WALL MOUNT VDE-TYPE, 12.0VDC 0.20Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 2.40VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A21220G	12.0V	0.20A	2.40VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*43W*37H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx43Wx37H (EI35*16)

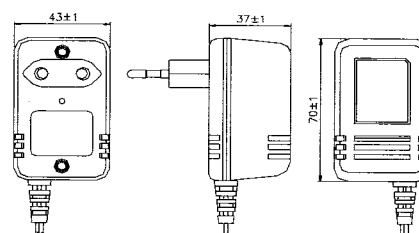

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 12.0VDC 0.40Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to .4.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A31240G	12.0V	0.40A	4.80VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*51W*39.5H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx51Wx39.5H (EI41*16)

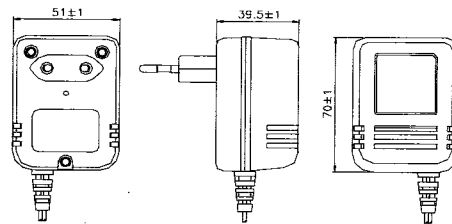

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 12.0VDC 0.50Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 6.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A31250G	12.0V	0.50A	6.0VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 75L*51W*39.5H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 75Lx51Wx39.5H (EI41*21)

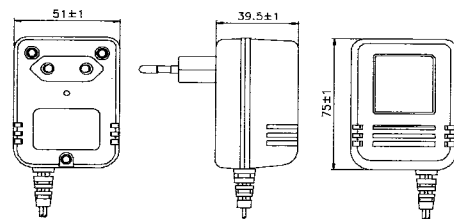

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 12.0VDC 0.75Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 9.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A41207G	12.0V	0.75A	9.0VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 83L*58W*46H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 83Lx58Wx46H (EI48*23)

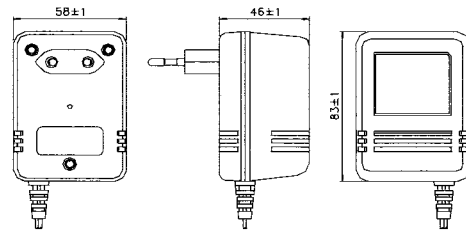

For reference only.
For details please contact your local sales representative



SINO-AMERICAN ELECTRONIC CO., LTD.

www.sac.com.tw

WALL MOUNT VDE-TYPE, 12.0VDC 0.10Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 1.20VA
- ◆ Regulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
R2W012-100G	12.0V	0.10A	1.20VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*43W*37H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx43Wx37H (EI35*16)

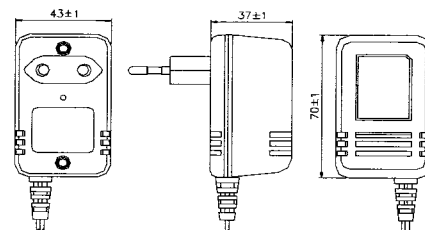

For reference only.
For details please contact your local sales representative



WALL MOUNT VDE-TYPE, 12.0VDC 0.60Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount VDE -2PIN Style
- ◆ Single Output up to 7.20VA
- ◆ Regulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
R4W012-060G	12.0V	0.60A	7.20VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration EN50075 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 89L*61W*47H(mm)
- ◆ Safety Regulation EN61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 89Lx61Wx47H (E148*30)

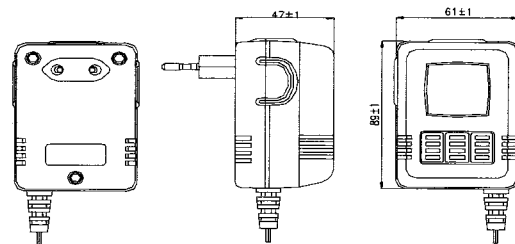

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 6.0VDC 0.30Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 1.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A20630B	6.0V	0.30A	1.80VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70.6L*43W*37H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70.6Lx43Wx37H (EI35*16)

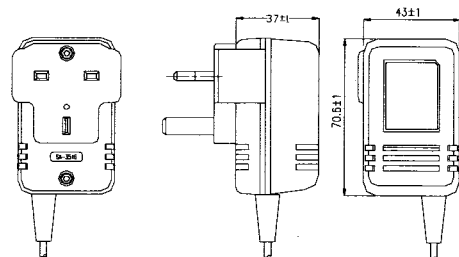

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 6.0VDC 0.50Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 3.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30650B	6.0V	0.50A	3.0VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Relative Humidity 30%~85%
- ◆ Storage Temperature -20°C ~70°C
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*51W*39.5H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx51Wx39.5H (EI41*16)

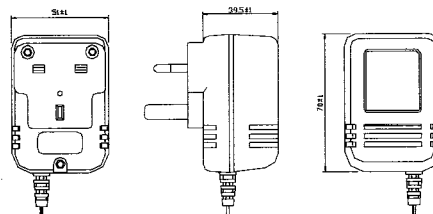

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 6.0VDC 0.80Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 4.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30608B	6.0V	0.80A	4.80VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Relative Humidity 30%~85%
- ◆ Storage Temperature -20°C ~70°C
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 75L*51W*39.5H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 75Lx51Wx39.5H (EI41*21)

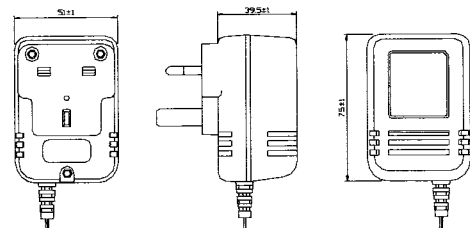

For reference only.

For details please contact your local sales representative



WALL MOUNT BS-TYPE, 6.0VDC 1.0Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 6.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A40610B	6.0V	1.0A	6.0VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 83L*58W*46H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 83Lx58Wx46H (EI48*23)

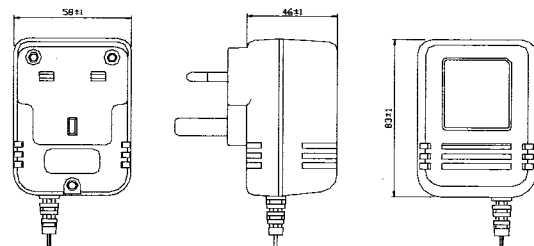

For reference only.
For details please contact your local sales representative



SINO-AMERICAN ELECTRONIC CO., LTD.

www.sac.com.tw

WALL MOUNT BS-TYPE, 6.0VDC1.50Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 9.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A40615B	6.0V	1.50A	9.0VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 20AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 89L*61W*46H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 89Lx61Wx46H (E148*30)

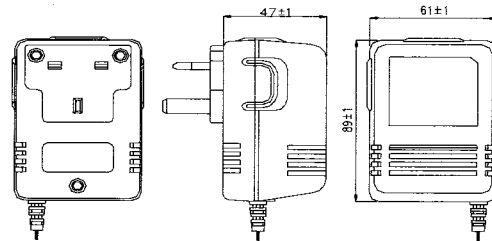

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 6.0VDC 0.20Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 1.20VA
- ◆ Regulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
R2W006-200B	6.0V	0.20A	1.20VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70.6L*43W*37H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70.6Lx43Wx37H (E135*16)

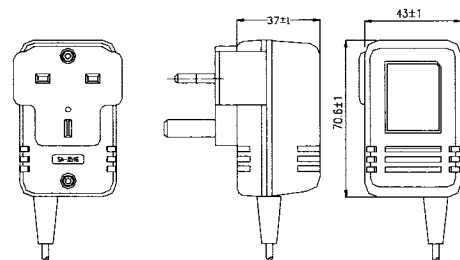

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 6.0VDC 0.90Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 5.40VA
- ◆ Regulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
R4W006-090B	6.0V	0.90A	5.40VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 89L*61W*46H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 89Lx61Wx46H (EI48*30)

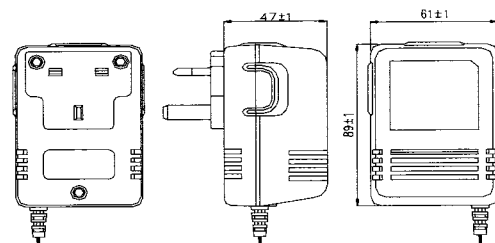

For reference only.

For details please contact your local sales representative



WALL MOUNT BS-TYPE, 9.0VDC 0.30Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 2.70VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A20930B	9.0V	0.30A	2.70VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70.6L*43W*37H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70.6Lx43Wx37H (EI35*16)

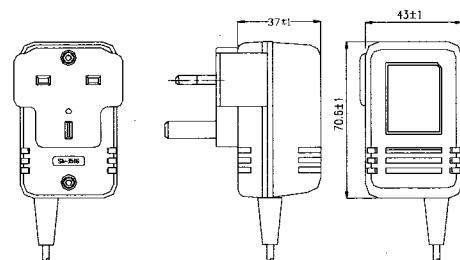

For reference only.
For details please contact your local sales representative



SINO-AMERICAN ELECTRONIC CO., LTD.

www.sac.com.tw

WALL MOUNT BS-TYPE, 9.0VDC 0.50Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 4.50VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30950B	9.0V	0.50A	4.50VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*51W*39.5H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx51Wx39.5H (EI41*16)

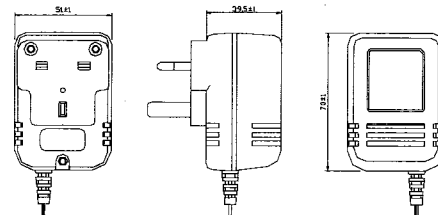

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 9.0VDC 0.70Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 6.30VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30907B	9.0V	0.70A	6.3VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 75L*51W*39.5H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 75Lx51Wx39.5H (EI41*21)

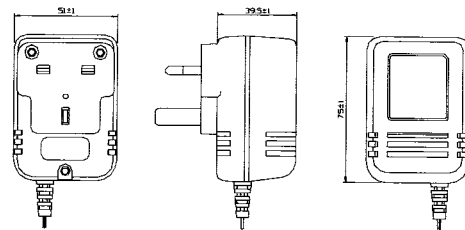

For reference only.
For details please contact your local sales representative



SINO-AMERICAN ELECTRONIC CO., LTD.

www.sac.com.tw

WALL MOUNT BS-TYPE, 9.0VDC 0.80Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 7.20VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A40908B	9.0V	0.80A	7.20VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 83L*58W*46H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 83Lx58Wx46H (EI48*23)

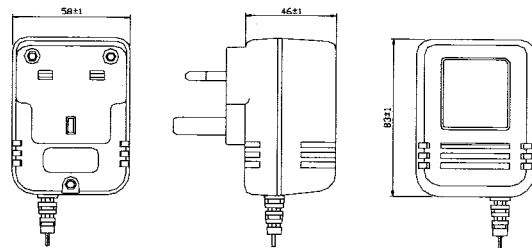

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 9.0VDC1.10Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 9.90VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A40911B	9.0V	1.10A	9.90VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Relative Humidity 30%~85%
- ◆ Storage Temperature -20°C ~70°C
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 89L*61W*46H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 89Lx61Wx46H (EI48*30)

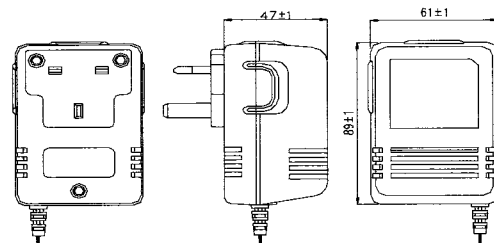

For reference only.

For details please contact your local sales representative



WALL MOUNT BS-TYPE, 12.0VDC 0.20Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 2.40VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A21220B	12.0V	0.20A	2.40VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70.6L*43W*37H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70.6Lx43Wx37H (EI35*16)

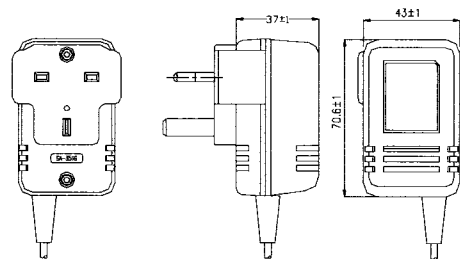

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 12.0VDC 0.40Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 4.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A31240B	12.0V	0.40A	4.80VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 70L*51W*39.5H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 70Lx51Wx39.5H (EI41*16)

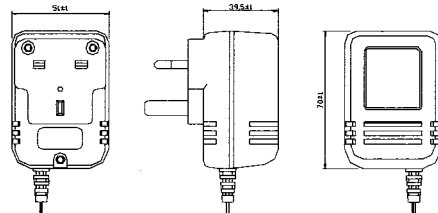

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 12.0VDC 0.75Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 9.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A41207B	12.0V	0.75A	9.0VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 83L*58W*46H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 83Lx58Wx46H (EI48*23)

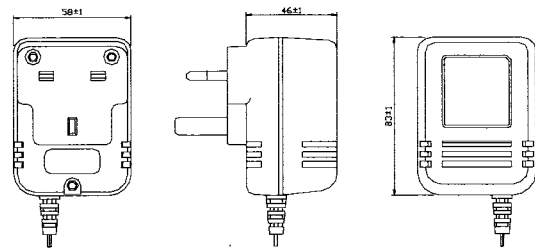

For reference only.
For details please contact your local sales representative



WALL MOUNT BS-TYPE, 12.0VDC0.90Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 10.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A41209B	12.0V	0.90A	10.80VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 89L*61W*46H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 89Lx61Wx46H (EI48*30)

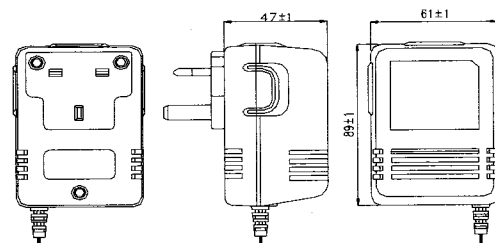

For reference only.

For details please contact your local sales representative



WALL MOUNT BS-TYPE, 12.0VDC 0.60Amps SPEC

Features

- ◆ 230VAC Input
- ◆ Wall mount BS-3PIN Style
- ◆ Single Output up to 7.20VA
- ◆ Regulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
R4W012-060B	12.0V	0.60A	7.20VA

Input

- ◆ Voltage 230VAC
- ◆ Line Frequency 50HZ
- ◆ Protection Thermal Fuse
- ◆ Configuration BS1363 3PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 4500Vac/1sec @ 5mA
Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA
@230VAC 50Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1*5.5*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 89L*61W*46H(mm)
- ◆ Safety Regulation IEC61558
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 89Lx61Wx46H (EI48*30)

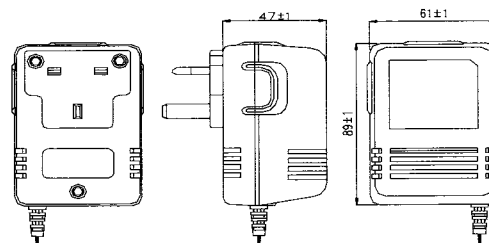

For reference only.
For details please contact your local sales representative