



**WALL MOUNT PSE-TYPE, 6.0VDC 0.17Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 1.02VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A10617J	6.0V	0.17A	1.02VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection New Thermal Copper wire
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 50L\*34W\*32H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 50Lx34Wx32H (EI28\*13)

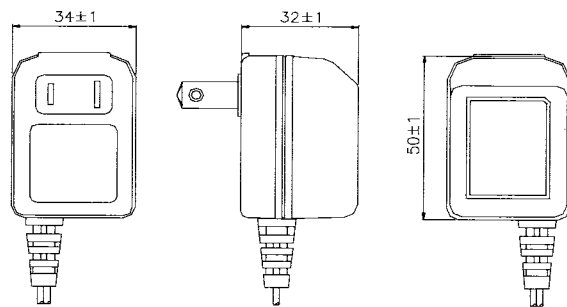

For reference only.  
 For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 6.0VDC 0.26Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 1.56VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A10626JN	6.0V	0.26A	1.56VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 53L\*34W\*33H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 53Lx34Wx33H (EI28\*16)

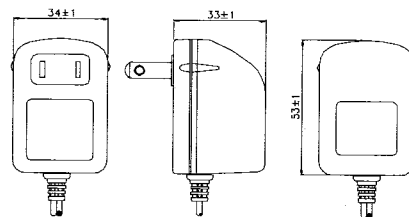

For reference only.  
For details please contact your local sales representative

**WALL MOUNT PSE-TYPE, 6.0VDC 0.30Amps SPEC**

## Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 1.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A20630NJ	6.0V	0.30A	1.80VA

## Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

## Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

## Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

## Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 56L\*42W\*37.8H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

## Outlook Drawing:

Size: 56Lx42Wx37.8H (EI35\*13)

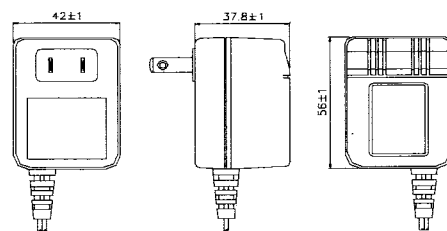

For reference only.

For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 6.0VDC 0.40Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 2.40VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A20640J	6.0V	0.40A	2.40VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 64L\*44W\*38H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 64Lx44Wx38H (EI35\*16)

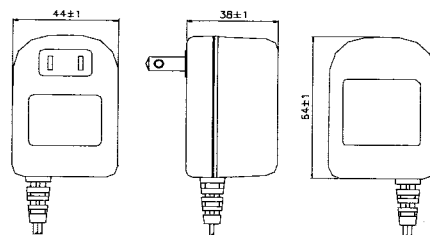

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 6.0VDC 0.50Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 3.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30650J	6.0V	0.50A	3.0VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 64L\*49W\*41H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 64Lx49Wx41H (EI41\*16)

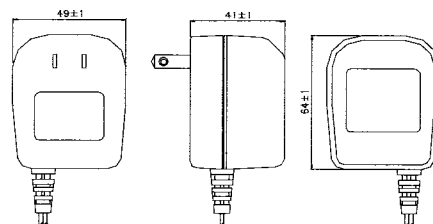

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 6.0VDC 0.80Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 4.8VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30680J	6.0V	0.80A	4.8VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 10-20VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Relative Humidity 30%~85%
- ◆ Storage Temperature -20°C ~70°C
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 74L\*51W\*41H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 74Lx51Wx41H (EI41\*21)

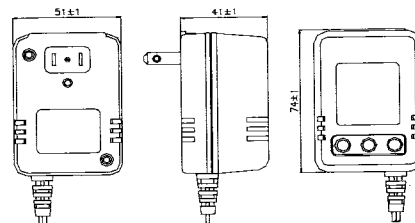



**WALL MOUNT PSE-TYPE, 6.0VDC 0.90Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 5.40VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30609QJ	6.0V	0.90A	5.40VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 10-20VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 77L\*51W\*40.2H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 77Lx51Wx40.2H (EI41\*25)

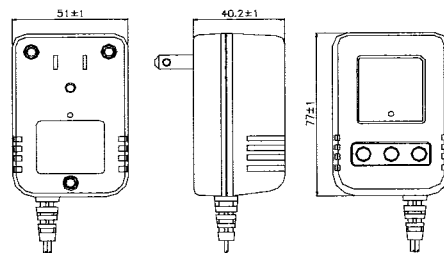

For reference only.

For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 6.0VDC 1.0Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 6.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A40610J	6.0V	1.0A	6.0VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 20-30VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 71L\*59W\*46H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 71Lx59Wx46H (EI48\*23)

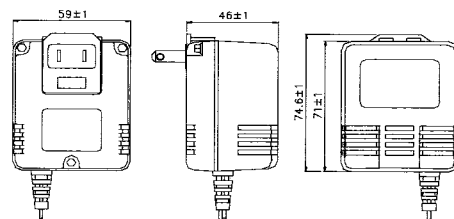

For reference only.  
For details please contact your local sales representative





**WALL MOUNT PSE-TYPE, 6.0VDC 1.50Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 9.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A40615J	6.0V	1.50A	9.0VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 20-30VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 20AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 89L\*61W\*47H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 89Lx61Wx47H (EI48\*30)

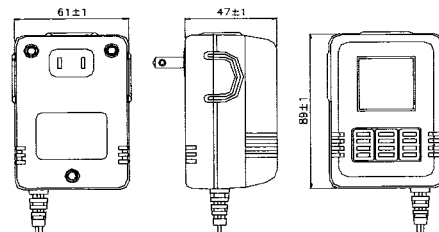

For reference only.

For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 9.0VDC 0.12Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 1.08VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A10912J	9.0V	0.12A	1.08VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection New Thermal Copper wire
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 50L\*34W\*32H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 50Lx34Wx32H (EI28\*13)

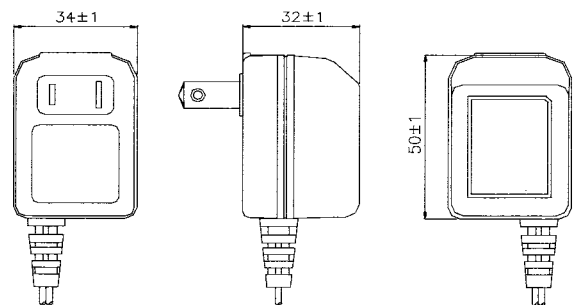

For reference only.  
 For details please contact your local sales representative

**WALL MOUNT PSE-TYPE, 9.0VDC 0.20Amps SPEC**

## Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 1.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A10920JN	9.0V	0.20A	1.80VA

## Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

## Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

## Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

## Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 53L\*34W\*33H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

## Outlook Drawing:

Size: 53Lx34Wx33H (EI28\*16)

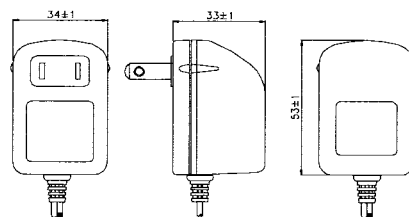

For reference only.

For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 9.0VDC 0.30Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 2.70VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A20930NJ	9.0V	0.30A	2.70VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 56L\*42W\*37.8H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 56Lx42Wx37.8H (EI35\*13)

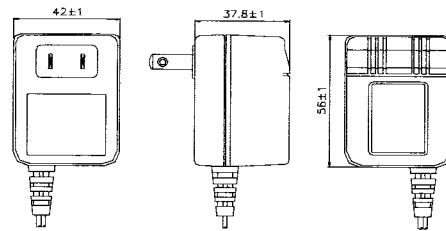

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 9.0VDC 0.35Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 3.15VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A20935J	9.0V	0.35A	3.15VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 64L\*44W\*38H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 64Lx44Wx38H (EI35\*16)

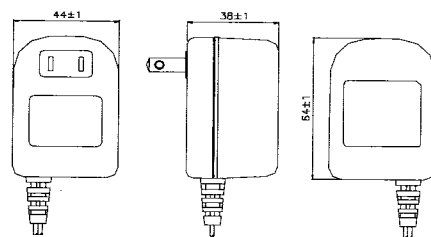

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 9.0VDC 0.40Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 3.6VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30950J	9.0V	0.40A	3.6VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 64L\*49W\*41H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 64Lx49Wx41H (EI41\*16)

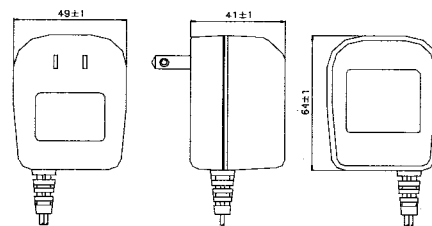

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 9.0VDC 0.60Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 5.40VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30960J	9.0V	0.60A	5.40VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 10-20VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 74L\*51W\*41H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 74Lx51Wx41H (EI41\*21)

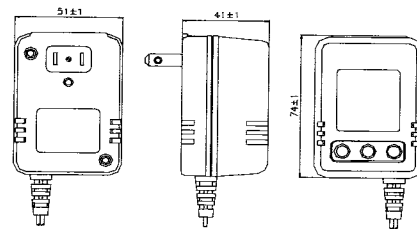

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 9.0VDC 0.80Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 7.20VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A30908QJ	9.0V	0.80A	7.20VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 10-20VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 77L\*51W\*40.2H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 77Lx51Wx40.2H (EI41\*25)

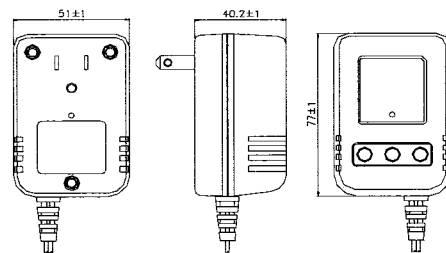

For reference only.  
For details please contact your local sales representative





**WALL MOUNT PSE-TYPE, 9.0VDC 0.90Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 8.10VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A40909J	9.0V	0.90A	8.10VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 20-30VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Relative Humidity 30%~85%
- ◆ Storage Temperature -20°C ~70°C
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 71L\*59W\*46H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 71Lx59Wx46H (EI48\*23)

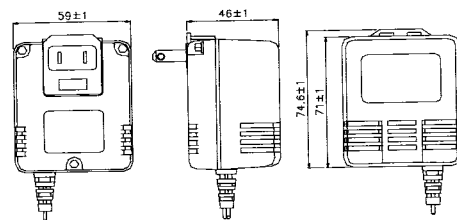

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 12.0VDC 0.08Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 0.96VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A11208J	12.0V	0.08A	0.96VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection New Thermal Copper wire
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 50L\*34W\*32H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 50Lx34Wx32H (EI28\*13)

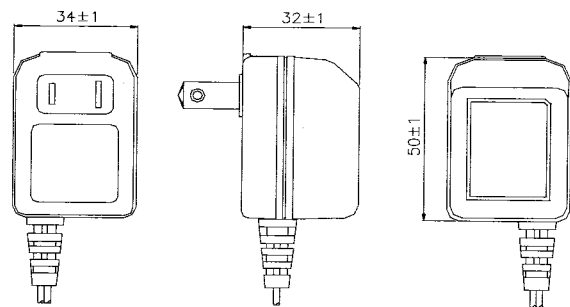

For reference only.  
 For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 12.0VDC 0.15Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 1.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A11215JN	12.0V	0.15A	1.80VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 53L\*34W\*33H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 53Lx34Wx33H (EI28\*16)

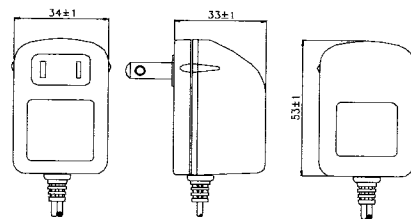

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 12.0VDC 0.20Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 2.40VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A21220NJ	12.0V	0.20A	2.40VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 56L\*42W\*37.8H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 56Lx42Wx37.8H (EI35\*13)

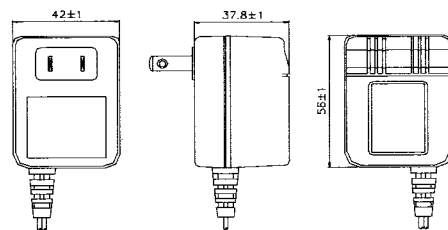

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 12.0VDC 0.25Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 3.00VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A21225J	12.0V	0.25A	3.00VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Relative Humidity 30%~85%
- ◆ Storage Temperature -20°C ~70°C
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 64L\*44W\*38H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 64Lx44Wx38H (EI35\*16)

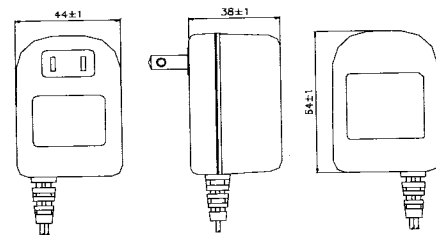

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 12.0VDC 0.40Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 4.8VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A31240J	12.0V	0.40A	4.8VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA Under 10VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (Non vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl or ABS
- ◆ Case Dimensions 64L\*49W\*41H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 64Lx49Wx41H (EI41\*16)

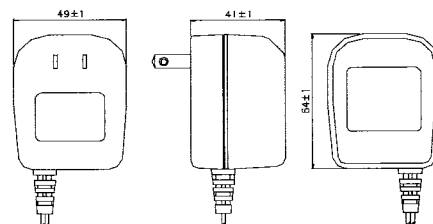

For reference only.  
For details please contact your local sales representative



SINO-AMERICAN ELECTRONIC CO., LTD.

[www.sac.com.tw](http://www.sac.com.tw)

**WALL MOUNT PSE-TYPE, 12.0VDC 0.50Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 6.0VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A31250J	12.0V	0.50A	6.0VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 10-20VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 24AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 74L\*51W\*41H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 74Lx51Wx41H (EI41\*21)

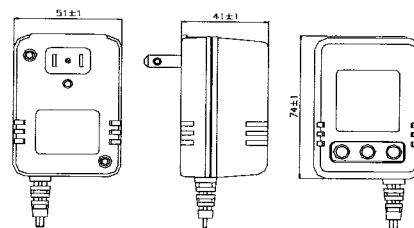

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 12.0VDC 0.60Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 7.20VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A31260QJ	12.0V	0.60A	7.20VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 10-20VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 77L\*51W\*40.2H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 77Lx51Wx40.2H (EI41\*25)

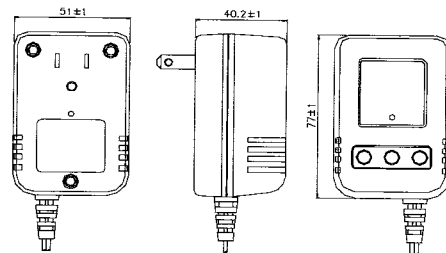

For reference only.  
For details please contact your local sales representative





**WALL MOUNT PSE-TYPE, 12.0VDC 0.80Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 9.60VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A41208J	12.0V	0.80A	9.60VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 20-30VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 71L\*59W\*46H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 71Lx59Wx46H (EI48\*23)

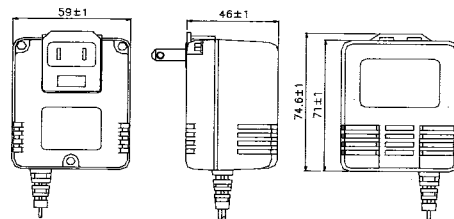

For reference only.  
For details please contact your local sales representative



**WALL MOUNT PSE-TYPE, 12.0VDC 0.90Amps SPEC**

Features

- ◆ 100VAC Input
- ◆ Wall mount PSE-2PIN Style
- ◆ Single Output up to 10.80VA
- ◆ Unregulated Output
- ◆ Meets Safety Agency Requirements
- ◆ Impact Resistant Enclosure
- ◆ Private Label Marking Available
- ◆ One Year Warranty
- ◆ Manufactured in China

SAC Model	Voltage DC	Maximum Current	Maximum Watts
A41209J	12.0V	0.90A	10.80VA

Input

- ◆ Voltage 100VAC
- ◆ Line Frequency 50/60HZ
- ◆ VA 20-30VA Ref @100VAC
- ◆ Protection Thermal Fuse
- ◆ Configuration JIS8303 2PIN

Electrical

- ◆ Topology Linear transformer Mode
- ◆ Dielectric 1200Vac/1sec @ 5mA
- ◆ Withstand (primary-secondary)
- ◆ Leakage Current Less than 0.25mA @100VAC 50/60Hz

Environmental


- ◆ Operating Ambient 25°C Temperature
- ◆ Storage Temperature -20°C ~70°C
- ◆ Relative Humidity 30%~85%
- ◆ MTBF 100,000 Calculated Hours

Mechanical

- ◆ DC Cord 6ft, 22AWG\*2C
- ◆ Cooling Convectional (vented case)
- ◆ Output Plug 2.1\*5.5\*9.5mm or equivalent
- ◆ Case Material Noryl
- ◆ Case Dimensions 89L\*61W\*47H(mm)
- ◆ Safety Regulation PSE
- ◆ Package Optional
- ◆ MOQ 1KPCS/Lot

Outlook Drawing:

Size: 89Lx61Wx47H (EI48\*30)

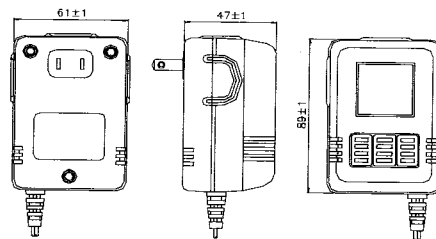

For reference only.  
For details please contact your local sales representative