



1. EIAJ RV-5320 SERIES


SACNO.PJ-1S

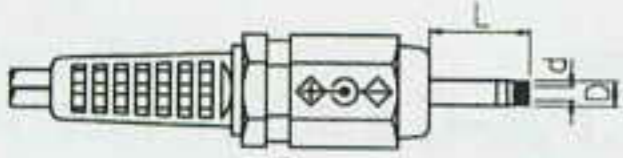


SACNO.PJ-1L

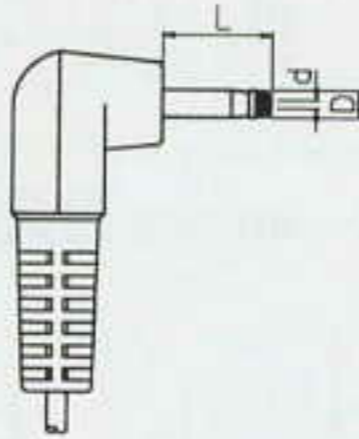


SACNO.PJ-2S

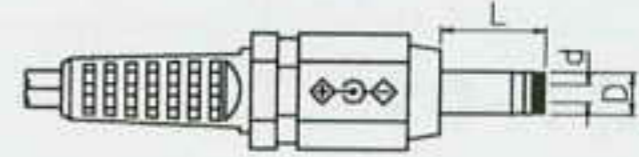


SACNO.PJ-2L

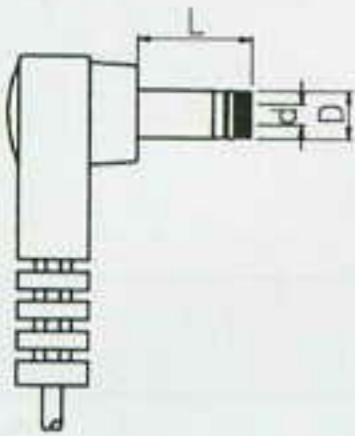


SACNO.PJ-3S

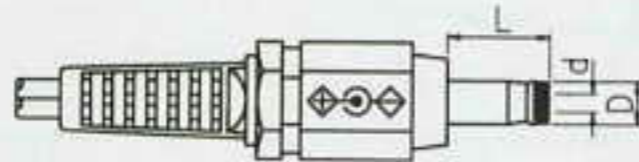


SACNO.PJ-3L

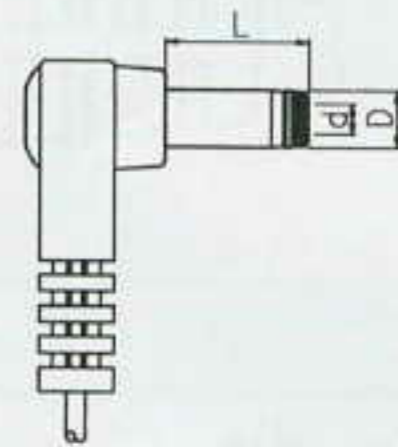


SACNO.PJ-4S

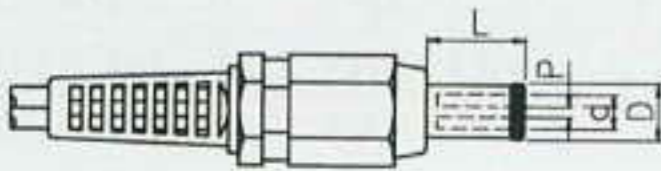

SACNO.PJ-4L

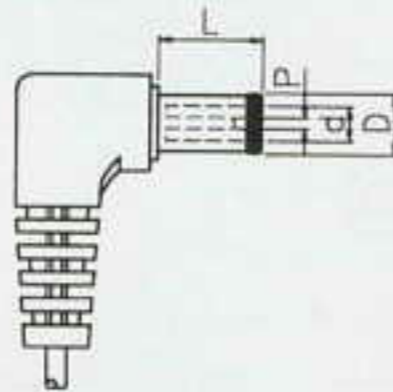


SACNO.PJ-5L

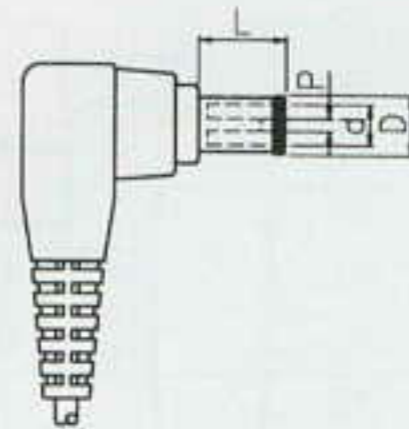


EIAJ NO.	SAC NO.	OUTPUT VOLTAGE DIVISION	DC CORD	WIRE GAUGE	D +0.1, -0	d +0.1, -0	L +0.3, -0.3	P +0.0, -0.1
1	PJ-1S	3.15V MAX	PARALLEL	#22, #24	2.35 Ø	0.7 Ø	9.5	
1	PJ-1L	3.15V MAX	PARALLEL	#22, #24	2.35 Ø	0.7 Ø	9.5	
2	PJ-2S	3.15V-6.3V MAX	PARALLEL	#22, #24	4 Ø	1.7 Ø	9.5	
2	PJ-2L	3.15V-6.3V MAX	PARALLEL	#22, #24	4 Ø	1.7 Ø	9.5	
2	PJ-2L	3.15V-6.3V MAX	PARALLEL	#22, #24	4 Ø	1.7 Ø	9.5	
3	PJ-3S	6.3V-10.5V MAX	PARALLEL	#22, #24	4.75 Ø	1.7 Ø	9.5	
3	PJ-3L	6.3V-10.5V MAX	PARALLEL	#22, #24	4.75 Ø	1.7 Ø	9.5	
4	PJ-4S	10.5V-13.5V MAX	PARALLEL	#22, #24	5.5 Ø	3.3 Ø	9.5	1.0 Ø
4	PJ-4L	10.5V-13.5V MAX	PARALLEL	#22, #24	5.5 Ø	3.3 Ø	9.5	1.0 Ø
5	PJ-5L	13.5V-18V MAX	PARALLEL	#18, #20	6.5 Ø	4.4 Ø	9.5	1.37 Ø

3. FEMALE PLUG


SAC NO.P A-03A

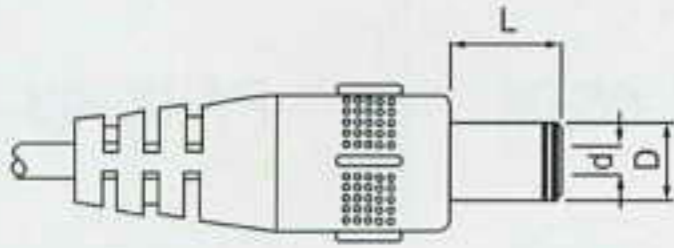


SAC NO.P A-03B

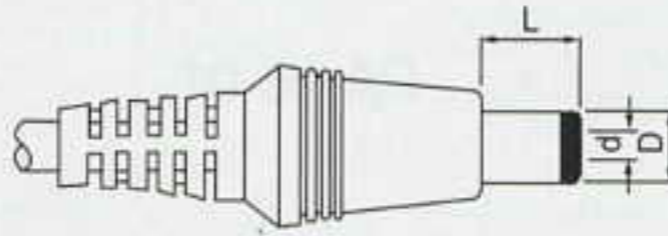


SAC NO.P A-03C

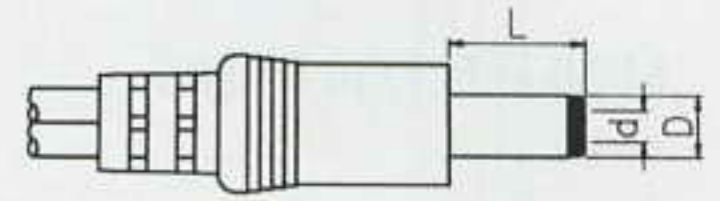

SAC NO.P A-04

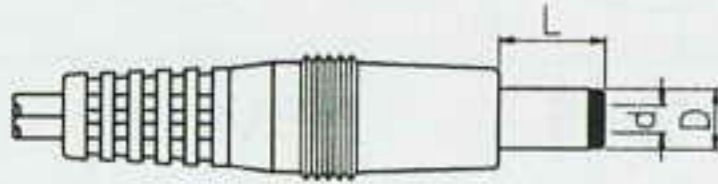

SAC NO.P A-05

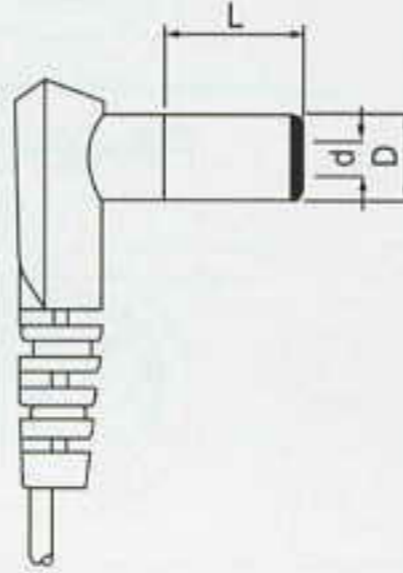

SAC NO.	DC CORD	WIRE GAUGE	D +0.1, -0.1	d +0.1, -0.1	L +0.3, -0.3
PA-03A-01	PARALLEL	#22, #24	3.5 Ø	1.3 Ø	9.5
PA-03A-02	PARALLEL	#22, #24	3.5 Ø	1.3 Ø	11
PA-03A-03	PARALLEL	#20	5.0 Ø	2.1 Ø	9.5
PA-03A-04	PARALLEL	#20	5.0 Ø	2.1 Ø	11
PA-03A-05	PARALLEL	#18, #20	5.5 Ø	2.5 Ø	9.5
PA-03A-06	PARALLEL	#18, #20	5.5 Ø	2.5 Ø	11
PA-03A-07	PARALLEL	#20	6.5 Ø	3.0 Ø	9.5
PA-03A-08	PARALLEL	#20	6.5 Ø	3.0 Ø	11
PA-03A-09	PARALLEL	#22, #24	5.5 Ø	2.1 Ø	9.5
PA-03A-10	PARALLEL	#22, #24	5.5 Ø	2.1 Ø	11
PA-03B-01	PARALLEL	#22, #24	5.0 Ø	2.1 Ø	9.5
PA-03B-02	PARALLEL	#22, #24	5.0 Ø	2.1 Ø	11
PA-03B-03	PARALLEL	#22, #24	5.5 Ø	2.5 Ø	9.5
PA-03B-04	PARALLEL	#22, #24	5.5 Ø	2.5 Ø	11
PA-03B-05	PARALLEL	#22, #24	5.5 Ø	2.1 Ø	11
PA-03C-01	PARALLEL	SPT-1 #18, XTW-A #20	5.5 Ø	2.1 Ø	11
PA-04-01	PARALLEL	#22, #24	5.5 Ø	2.1 Ø	9.5
PA-04-02	PARALLEL	#22, #24	5.5 Ø	2.1 Ø	11
PA-04-03	PARALLEL	#22, #24	5.5 Ø	2.5 Ø	9.5
PA-04-04	PARALLEL	#22, #24	5.5 Ø	2.5 Ø	11
PA-05-01	PARALLEL	#22, #24	5.0 Ø	2.1 Ø	9.5
PA-05-02	PARALLEL	#22, #24	5.0 Ø	2.1 Ø	11
PA-05-03	PARALLEL	#22, #24	5.0 Ø	2.5 Ø	11
PA-05-04	PARALLEL	#22, #24	5.5 Ø	2.1 Ø	9.5
PA-05-05	PARALLEL	#22, #24	5.5 Ø	2.1 Ø	11
PA-05-06	PARALLEL	#22, #24	5.5 Ø	2.5 Ø	9.5
PA-05-07	PARALLEL	#22, #24	5.5 Ø	2.5 Ø	11